

Sechskant-Bohrschrauben



angepreßter Bund - reduzierte Bohrspitze

Hexagon washer head self drilling screws

with reduced drilling point

Vis autoforeuse-tête hexagonale

embase cylindrique - pointe réduite




① Stahl verzinkt
Steel zinc plated
Acier zingué

Ø 4,8 / 6,3 mm

SW = 8 mm

☛ = C




4,8 x 20 mm	8 mm	250	40108 48 200
6,3 x 22 mm	8 mm	250	40108 63 220

Ø 6,3 mm

SW = 8 mm

☛ = C




6,3 x 23 mm	8 mm	250	40108 63 230

Ø 6,3 mm

SW = 8 mm

☛ = C




6,3 x 32 mm	8 mm	250	40108 63 320

Ø 6,5 mm

SW = 8 mm

☛ = A



6,5 x 50 mm	8 mm	250	40108 65 500

Sechskant-Bohrschrauben


angepreßter Bund - reduzierte Bohrspitze

Hexagon washer head self drilling screws

with reduced drilling point

Vis autoforeuse-tête hexagonale

embase cylindrique - pointe réduite

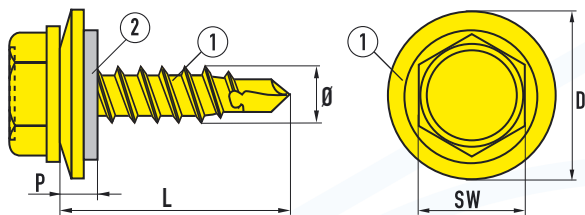

Stahl verzinkt
Steel zinc plated

① Acier zingué

② EPDM
EPDM
EPDM


Ø 4,9 / 6,3 mm

SW = 8 mm

P = 3 mm

D = 14 / 16 mm

☰ = A / C



4,9 x 20 mm	8 mm	500	40109 49 200
6,3 x 20 mm	8 mm	500	40109 63 200
6,3 x 25 mm	8 mm	500	40109 36 250


Ø 4,9 / 6,5 mm

SW = 8 mm

P = 3 mm

D = 14 / 16 mm

☰ = A



4,9 x 28 mm	8 mm	250	40109 49 280
4,9 x 35 mm	8 mm	250	40109 46 350
4,9 x 60 mm	8 mm	250	40109 49 600
4,9 x 80 mm	8 mm	250	40109 49 800
6,5 x 50 mm	8 mm	250	40109 65 500

Sechskant-Bohrschrauben


angepreßter Bund - gehärtete reduzierte Bohrspitze

Hexagon washer head self drilling screws

with hardened and reduced drilling point

Vis autoforeuse-tête hexagonale

embase cylindrique - pointe renforcée réduite

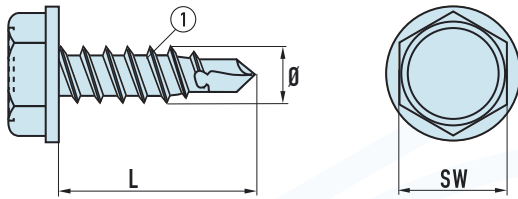


- ① A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL silber GL
 A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL silver GL
 A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL GL argenté

Ø 4,8 / 5,5 / 6,3 mm

SW = 8 mm

➤ = C



4,8 x 20 mm	8 mm	250	88810 48 201
5,5 x 22 mm	8 mm	250	88810 55 221
6,3 x 25 mm	8 mm	250	88810 63 250

Ø 4,9 / 6,5 mm

SW = 8 mm

➤ = A




4,9 x 35 mm	8 mm	250	88810 49 351
4,9 x 80 mm	8 mm	250	88810 49 801
6,5 x 50 mm	8 mm	250	88810 65 501
6,5 x 65 mm	8 mm	250	88810 65 651

Ø 6,0 mm

SW = 8 mm

➤ = C



6,0 x 35 mm	8 mm	250	88810 60 351

Sechskant-Bohrschrauben


angepreßter Bund - gehärtete reduzierte Bohrspitze

Hexagon washer head self drilling screws

with hardened and reduced drilling point

Vis autoforeuse-tête hexagonale

embase cylindrique - pointe renforcée réduite

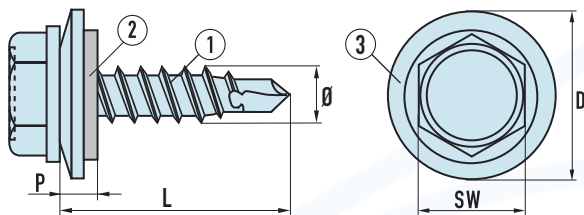

A2 W.-Nr. 1.4301/03 AISI 305 **GOEBEL silber GL**

A2 W.-Nr. 1.4301/03 AISI 305 **GOEBEL silver GL**

A2 W.-Nr. 1.4301/03 AISI 305 **GOEBEL GL argenté**

①

②

EPDM
EPDM
EPDM

③

A2 W.-Nr. 1.4301/03 AISI 305
A2 W.-Nr. 1.4301/03 AISI 305
A2 W.-Nr. 1.4301/03 AISI 305


Ø 4,8 / 5,5 / 6,3 mm





SW = 8 mm

P = 3 mm

D = 14 / 16 mm

☛ = C



			
4,8 x 20 mm	8 mm	250	88901 48 200
5,5 x 22 mm	8 mm	250	88901 55 220
6,3 x 25 mm	8 mm	250	88901 63 250


Ø 4,9 / 6,5 mm





SW = 8 mm

P = 3 mm

D = 14 / 16 mm

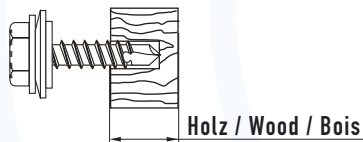☛ = A



			
4,9 x 35 mm	8 mm	250	88901 49 350
4,9 x 80 mm	8 mm	250	88901 49 800
6,5 x 50 mm	8 mm	250	88901 65 500
6,5 x 65 mm	8 mm	250	88901 65 650