

Linsenkopf-Bohrschrauben


mit Stern-Antrieb - gehärtete Bohrspitze

Pan head self drilling screws

Star drive - hardened drilling point

Vis autoforeuse-tête cylindrique bombée

empreinte étoile - pointe foreuse renforcée

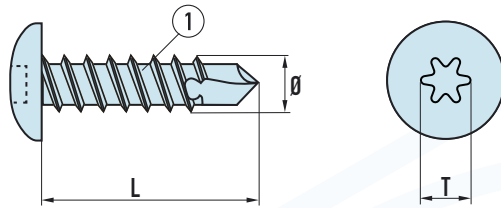


- ① A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL silber GL
 A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL silber GL
 A2 W.-Nr. 1.4301/03 AISI 305 GOEBEL GL argenté

Ø 5,5 mm

T = 25

☛ = C




5,5 x 22 mm	T 25	250	44033 55 220

Ø 5,5 mm

T = 25

☛ = A

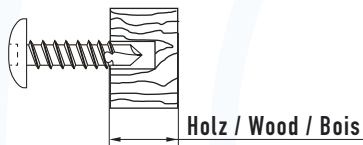


5,5 x 38 mm	T 25	250	44033 55 380

Ø 5,5 mm

T = 25

☛ = C



5,5 x 25 mm	T 25	250	44033 55 250
5,5 x 38 mm	T 25	250	44033 55 400
5,5 x 50 mm	T 25	250	44033 55 500

Linsenkopf-Bohrschrauben


mit Stern-Antrieb - gehärtete Bohrspitze

Pan head self drilling screws

Star drive - hardened drilling point

Vis autoforeuse-tête cylindrique bombée

empreinte étoile - pointe foreuse renforcée

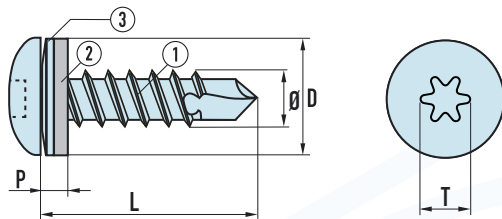

A2 W.-Nr. 1.4301/03 AISI 305 **GOEBEL** silber GL

A2 W.-Nr. 1.4301/03 AISI 305 **GOEBEL** silver GL

A2 W.-Nr. 1.4301/03 AISI 305 **GOEBEL** GL argenté

①

②

③

EPDM
EPDM
EPDM

A2 W.-Nr. 1.4301/03 AISI 305
A2 W.-Nr. 1.4301/03 AISI 305
A2 W.-Nr. 1.4301/03 AISI 305


Ø 5,5 mm

T = 25

P = 3 mm

D = 11 mm

➤ = C



5,5 x 22 mm	T 25	250	44244 55 220


Ø 5,5 mm

T = 25

P = 3 mm

D = 11 mm

➤ = A

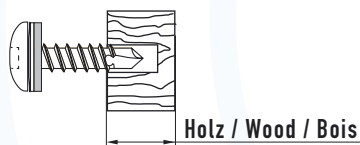

5,5 x 38 mm	T 25	250	44244 55 380

Ø 5,5 mm

T = 25

P = 3 mm

D = 11 mm

➤ = C



5,5 x 25 mm	T 25	250	44244 55 250
5,5 x 38 mm	T 25	250	44244 55 400
5,5 x 50 mm	T 25	250	44244 55 500